


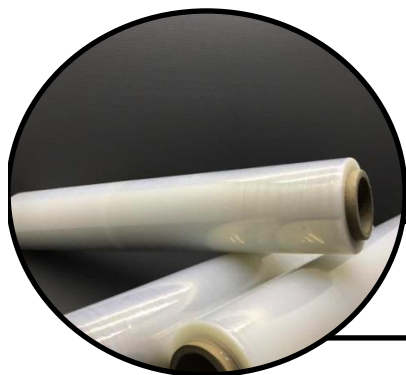

STRETCH FILM (23 MICRON)

DATE OF TEST : 18-01-17

PHYSICAL PROPERTIES		UNITS	TOLERANCE +/-	SPECIFICATION	TESTING METHOD
Thickness		Microns	2 μ m	23	Thickness Gauge
Width		Mm	5mm	500	Measuring Tape
Density		g/cm ³	-	0.91-0.92	ASTM D-1505
MECHANICAL PROPERTIES		UNITS	TOLERANCE +/-	SPECIFICATION	TESTING METHOD
Tensile Strength	MD	Mpa	10%	45	ASTM D 882
	TD		10%	26	
Break Elongation	MD	%	10%	550	ASTM D 882
	TD		10%	800	
Tear Strength	MD	Kg	10%	270	ASTN D 1922
	TD		10%	500	

SHELF LIFE :

One year from date of receipt by customer . Please keep in cool dry place .

GENERAL DESCRIPTION :

Pallet Stretch Film is made of linear low-density polyethylene film (LLDPE) as backing material.

APPLICATIONS :

Commonly used as protective film for cartons during shipping or warehouse distribution .
Excellent protection for packed products during storage and shipping.

Note : All information and recommendations are given by us in good faith on the basis of practical experience, but without warranty . The user shall determine the suitability of the product and the method of application for each specific use.

IDEALTAPE SDN BHD (969219-X)

NO : 7 JALAN BALAKONG JAYA 1 , TAMAN INDUSTRI BALAKONG JAYA , 43300 BALAKONG SELANGOR DARUL EHSAN , MALAYSIA .

TEL : 03-8964 0983 / 016-2100 268 FAX : 03-8964 0982 EMAIL : idealtapesb@gmail.com

WEBSITE : www.idealtape.com.my